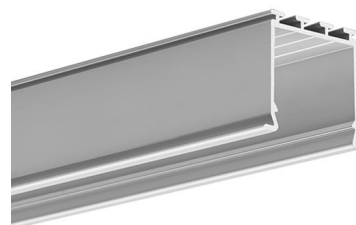


PRODUCT DESCRIPTION

- Ability to create a line of light
- Easy assembly and disassembly
- Can be combined in straight and broken linear runs
- Simple design

FINISH :

Silver anodized 

Fill empty fields

Product nr.	
Fixture type	
Company	
Job name	
Date	

TECHNICAL SPECIFICATION

Application

- main lighting installation in existing drywall structures

Assembly

- mounted with clips in the mounting extrusion


Additional information

- minimal flange effectively masks the mounting gap


AVAILABLE LENGTHS

Ref. nr.	surface finish	available lengths
B5553ANODA_1	Silver anodized	1000 mm
B5553ANODA_2	Silver anodized	2000 mm
B5553ANODA_3	Silver anodized	3000 mm


TECHNICAL DRAWING

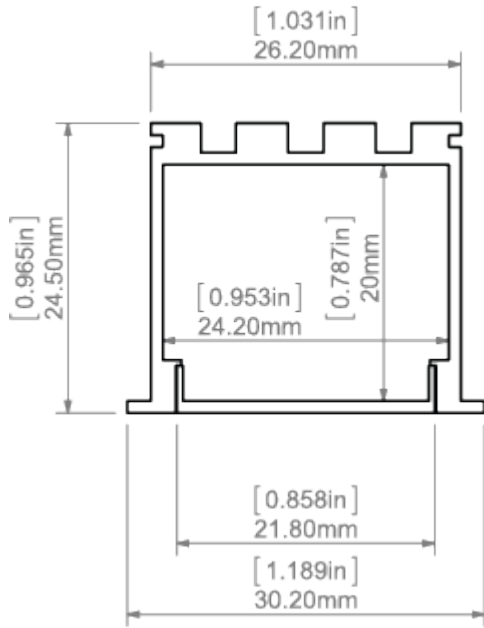

RELATED PROFILES




Ref: C0399




Ref: B6638V1

RELATED PRODUCTS


COVERS




Ref: 17044




Ref: 00415



Ref: 17006




Ref: 17008




Ref: 17042

60°




Ref: 17032V1

110°




Ref: 17022


70°



Ref: 17007



Ref: 00413



Ref: 17011


100°



END CAPS




Ref: 24103




Ref: 24005

ACCESSORIES




Ref: 24003




Ref: 00838V1




Ref: 00802




Ref: 42728




Ref: 42720




Ref: 42717




Ref: 42716




Ref: 42719




Ref: 42718




Ref: Kształtka L135




Ref: Kształtka L135PW




Ref: Kształtka L135PZ




Ref: Kształtka L90




Ref: Kształtka L90PW




Ref: Kształtka L90PZ




Ref: Kształtka T135L




Ref: Kształtka T135R



Ref: Kształtka T90



Ref: Kształtka X135



Ref: Kształtka X90

MARKETING MATERIALS



Ref: 90119M



Ref: 90052